

# 815 Smart Pressure Switch-Transmitters

The **815 Smart Pressure Switch-Transmitters** are rugged, compact, loop-powered instruments that are ideally suited for hazardous locations and hostile environments where space is limited. The 815 offers many industry standard outputs to meet applications where low-cost, discrete and continuous monitoring is required or preferred. This versatile instrument may be used to safely monitor and control many process applications, but is specifically designed for upstream, midstream, and downstream oil & gas applications. Its stainless-steel construction and three-year warranty dramatically reduces the total cost of ownership.

The 815 is easily configured using HART®7 Communication Protocol and Modbus RTU Serial Communications; it is also very easy to set the zero and span set points with a magnet, as the zero and span magnetic targets are clearly identified on the casting. The SOR 815 is a feature rich, low cost, compact transmitter that sits at the top of its class.

## Features

- HART®7 communication protocol with 4-20 mA output
- 1-5 VDC (low-power) mode of operation
- Modbus RTU (RS-485) serial communications
- Configurable normally-open solid-state switch output (SPST)
- $\pm 0.25\%$  (URL) continuous output accuracy
- Zero balance & URL:  $\pm 0.25\%$  URL (each)
- Compact, 316 stainless steel, explosion proof housing
- NACE MRO 175/ISO 15156 certification option available
- Hermetically sealed leads
- Pressure ranges: 0-5 psi to 0-30,000 psi for 815PT, 0-5 psid to 0-500 psid for 815DT
- Zero and span magnetic targets located on casting
- LCD display option available
- EMC (EMI/RFI) protection
- NEMA 4X, IP66 housing
- FM and ATEX/IECEX certified for hazardous locations in U.S., Canada and Europe
- Dual Seal approval
- 3 year warranty



**815PT  
Smart Pressure  
Switch-Transmitter**



**815DT Smart  
Differential Pressure  
Switch-Transmitter**



| Product Specifications                       |   |
|--|---|
| <b>Continuous Output</b>                     |   |
| Accuracy                                     | ±0.25% URL (BFSL)<br>(Linearity, Hysteresis and Repeatability)  |
| Zero Balance & URL                           | ±0.25% URL (Each)   |
| Output                                       | 4-20mA  |
|  | HART® 7 Communications Protocol   |
|  | Modbus RTU (RS-485) Serial Communications   |
|  | 1-5VDC (Low Power) Mode of Operation  |
|  | (36mW ± 5mW @ 10VDC)  |
| Temperature Effect                           | ±1% URL/100°F<br>@ -40 to 176°F   |
| <b>Switch Output</b>                         |   |
| 1: Off                                       |   |
| 2: Windowed, Normally-Open                   |   |
| 3: Windowed, Normally-Closed                 |   |
| 4: Single Point, Normally-Open               |   |
| 5: Single Point, Normally-Closed             |   |
| 6: PWM (Pulse Width Modulation), Pulsed Low  |   |
| 7: PWM (Pulse Width Modulation), Pulsed High |   |
| 8: Dead Band, Normally-Open                  |   |
| 9: Dead Band, Normally-Closed                |   |
| Accuracy                                     | ±0.25% URL  |
| Type   | Normally Open<br>Solid State Relay (SPST)   |
| Electrical Rating                            | 30V, 120mA  |
| Temperature Effect                           | ±1% URL/100°F<br>@ -40 to 130°F   |
| <b>Temperature Range</b>                     |   |
| Compensated                                  | -40 to 176°F (-40 to 80°C)  |
| Ambient                                      | -40 to 176°F (-40 to 80°C)  |
| Process                                      | -40 to 194°F (-40 to 90°C)  |
| Storage                                      | -40 to 194°F (-40 to 90°C)  |
| Long Term Stability                          | ≤ ±0.5% URL per year  |
| Response Time                                | ≤ 70 ms   |
| Supply Voltage                               | 10-36VDC<br>18-36 VDC (with LCD)  |
| Loop Resistance                              | 667 ohms @ 24VDC  |
| Circuit Protection                           | Reverse polarity<br>and EMC (EMI/RFI) protected   |
| <b>Construction</b>                          | 316SS housing (CF8M)  |
| <b>Process Connection</b>                    |   |
| 815PT  | 1/2" NPT(M) with 1/4" NPT(F)<br>or Autoclave F250C (F)<br>for 1/4" OD Tubing  |
| 815DT  | (H & L side) 1/4" NPT(F)  |
| <b>Electrical Connection</b>                 |   |
| Size   | 1/2" NPT(M)   |
| Termination                                  | 18 AWG shielded cable,<br>72-inch length  |
| <b>Wetted Materials</b>                      |   |
| 815PT  | 316/316L-SST (for 0-5 psi thru<br>0-50 psi & psia pressure ranges)<br>17-4SST (for pressure<br>ranges above 0-50 psi) |
| 815DT  | 316/316L-SST  |
| <b>Max Static Line Pressure</b>              |   |
| 815DT  | 1,000 psi   |
| <b>Over Pressure</b>                         |   |
| 815PT  |   |
| 0-5 thru 0-100 psi                           | 3 times FSPR  |
| 0-250 thru 0-10,000 psi                      | 2 times FSPR  |
| Up to 30,000 psi                             | 1.4 times FSPR  |
| 815DT  | 3 times FSPR  |
| <b>Burst Pressure</b>                        |   |
| 815PT  |   |
| 0-5 thru 0-100 psi                           | 4 times FSPR  |
| 0-250 psi                                    | 40 times FSPR   |
| 0-500 thru 0-1000 psi                        | 20 times FSPR   |
| 0-2500 psi                                   | 10 times FSPR   |
| 0-5000 psi                                   | 8 times FSPR  |
| 0-10,000 thru 0-15,000 psi                   | 4 times FSPR  |
| 0-30,000 psi                                 | 1.8 times FSPR  |
| 815DT  | 4 times FSPR  |
| <b>Weight</b>                                | 1.8 lb (0.8 kg)   |
| <b>Warranty</b>                              | 3 years   |


Design and specifications are subject to change without notice. For latest revision, see SORInc.com.

The switch output of the 815 is a Normally Open Solid State Relay rated for 30V, 120mA. It can be configured 9 ways; as shown in the following diagrams. Switch set point(s) and continuous output zero and span points are set at the factory as specified by the customer. The switch configuration can also be modified with a HART communicator.

In all nine configurations, the fail-safe state for the 815 switch output will be open (i.e., if power is removed from the 815, the switch contacts will open automatically).


- ❶ Off
- ❷ Windowed, Normally-Open
- ❸ Windowed, Normally-Closed
- ❹ Single Point, Normally-Open
- ❺ Single Point, Normally-Closed
- ❻ PWM (Pulse Width Modulation), Pulsed Low
- ❼ PWM (Pulse Width Modulation), Pulsed High
- ❽ Dead Band, Normally-Open
- ❾ Dead Band, Normally-Closed

### ❷ Windowed, Normally-Open

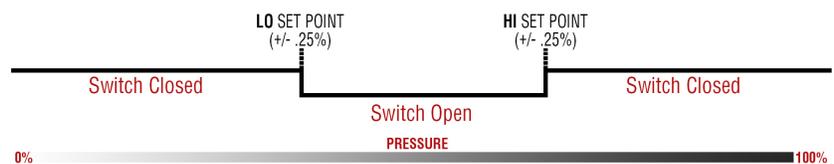


In this configuration, the switch output will be open when the process pressure is within a user selectable range and closed when the pressure is outside of these boundaries. This is designed for applications where there is a known acceptable operating pressure range.

### ❸ Windowed, Normally-Closed

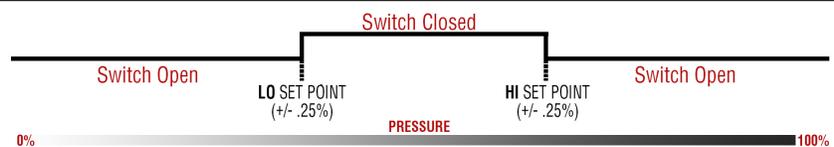

In this configuration, the switch output will be closed when the process pressure is within a user selectable range and open when the pressure is outside of these boundaries. This is designed for applications where there is a known acceptable operating pressure range.

### ❹ Single Point, Normally-Open (Close on Rise/ Open on Fall)

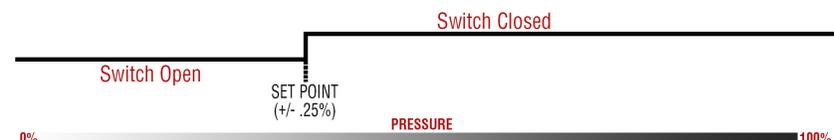


In this configuration, the switch output will be open for pressures less than the selected setpoint. The switch output would then be closed for pressures greater than the setpoint.

### ❺ Single Point, Normally-Closed (Open on Rise/ Close on Fall)




In this configuration, the switch output will be closed for pressures less than the selected setpoint. The switch output would then be open for pressures greater than the setpoint.

### ⑥ Pulse Width Modulation - Pulsed Lo

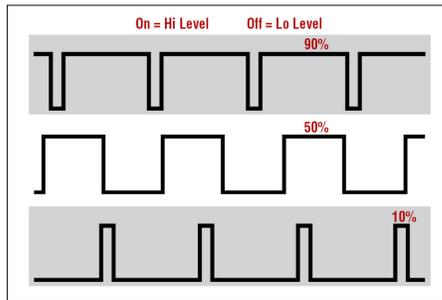


### ⑦ Pulse Width Modulation - Pulsed Hi

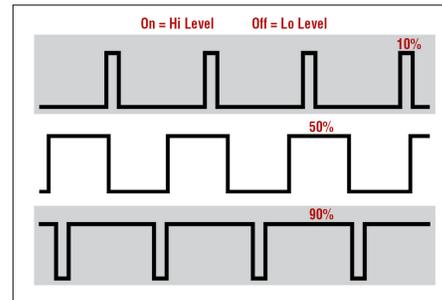

### ⑧ & ⑨ Dead Band

This diagram depicts an adjustable dead band. Dead band is the range through which an input can be varied without initiating an observable response. Dead band is usually expressed in percent of span.

**EXAMPLE:** A 20% total dead band is applied to the setpoint of a monitored parameter. The relay will turn on and off as indicated in the graph above.

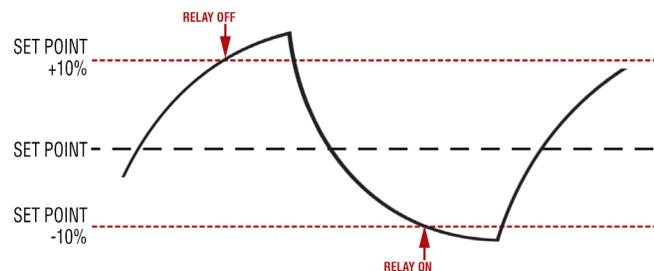

**Note:** The continuous zero and span points and the Switch Configuration Mode and set point(s) must be specified. Refer to switch configuration diagrams on page 6.

*Example: 815PT-Z07-A-RR, which has a range of 0-2500 psi could be ordered with zero and span of 200 psi and 2300 psi. The window mode switch configuration could have a LO set point of 210 psi and a HI set point of 2290 psi.*

### External Magnetic Zero & Span



The 815PT and 815DT can be easily configured externally with a magnet. Simply place a magnet to the targets located on the housing for 3 seconds and set the zero and span.

To set the Zero, simply follow the steps below:

- Step 1: Bring the pressure to the desired Zero value.
- Step 2: Place the magnet on the circle target located on the housing and hold for 3 seconds.
- Step 3: After zero value is set, remove the magnet.



To set the Span, follow the same steps except place the magnet on the triangle on the housing for 3 seconds. Using this method requires a power and a pressure source. Almost any magnet can be used, and SOR can provide the magnetic tool if needed.

# 815 Smart Pressure Switch-Transmitters

## How to Order

### How to Order

Below is the SOR quick select model number tree that provides you with all the options to configure and order a product for your application.

- You must select a designator for each component
- Reference tables, charts and additional information are provided throughout the catalog to help you make your selections, see pages noted in the tree.

| Range  |          | 3 | 4                   | Process Connection Size  |
|--|----------|---|---------------------|--|
| <b>815PT</b>   |          |   |                     | <b>815PT</b>   |
| 0-5 psi  | 00       |   | A                   | 316/316L SS, 1/2"NPT(M) with 1/4"NPT(F) Process Connection (316SS for ranges 0-50 psi and below, 17-4SS for ranges above 0-50 psi) |
| 0-15 psi   | 01       |   |                     |  |
| 0-50 psi   | 02       |   | S                   | 316L SS 1/2"NPT(M) Flush-Mount, Liquid-Filled, Diaphragm Seal, Process Connection <sup>2</sup>                                     |
| 0-100 psi  | 03       |   |                     |  |
| 0-250 psi  | 04       |   | H                   | 17-4SS, Autoclave F250C Female (For 1/4" OD Tubing), Process Connection <sup>3</sup>   |
| 0-500 psi  | 05       |   |                     |  |
| 0-1000 psi   | 06       |   |                     |  |
| 0-2500 psi   | 07       |   |                     |  |
| 0-5000 psi   | 08       |   | D                   | <b>815DT</b><br>316/316L SS, 1/4"NPT(F) Differential Process Connection (HI & LO side)   |
| 0-10000 psi  | 09       |   |                     |  |
| 0-15000 psi  | 10       |   |                     |  |
| 0-30000 psi  | 11       |   |                     |  |
| 0-15 psia  | 13       |   |                     |  |
| 0-50 psia  | 14       |   |                     |  |
| 0-100 psia   | 15       |   |                     |  |
| <b>815DT</b>   |          |   |                     |  |
| 0-138 in H <sub>2</sub> O (0-5 psid)                                   | 21       |   |                     |  |
| 0-415 in H <sub>2</sub> O (0-15 psid)                                  | 22       |   |                     |  |
| 0-50 psid  | 23       |   |                     |  |
| 0-100 psid   | 24       |   |                     |  |
| 0-300 psid   | 25       |   |                     |  |
| 0-500 psid   | 26       |   |                     |  |
| Protocol/Output  |          | 2 | 5 Accessories       |  |
| HART <sup>®</sup> 7 and ModBus RTU<br>4-20 mA and 1-5 VDC <sup>1</sup> | Z        |   | IN                  | LCD Display for local indication (see page 12 for more information)  |
|  |          |   | BB                  | Cleaned for industrial oxygen service  |
|  |          |   | DS                  | Dual Seal approval (FM) <sup>4</sup>   |
|  |          |   | NC                  | Compliance to NACE Certification MR0 175/ISO 15156 (Only available with S process connection. Consult factory for other ranges.)   |
|  |          |   | NM                  | INMETRO approved (not available for ranges 13-15)  |
|  |          |   | PK                  | Pipe mounting kit  |
|  |          |   | RR                  | SS tag wired to housing with customer specified information  |
|  |          |   | HA                  | High Accuracy±0.1% URL   |
|  |          |   | <b>Certificates</b> |  |
|  |          |   | C1                  | Calibration  |
|  |          |   | C2                  | Hydrostatic Pressure Test (not available with range option 11)   |
|  |          |   | C3                  | Inspection Report  |
|  |          |   | C4                  | Compliance/Conformance   |
|  |          |   | C8                  | Typical Material of Wetted Parts   |
|  |          |   | D1                  | Certificate of Origin  |
|  |          |   | D2                  | Manufacturer's Certification   |
| <b>Model</b>   | <b>1</b> |   |                     |  |
| Smart Gauge Pressure Transmitter                                       | 815PT    |   |                     |  |
| Smart Differential Pressure Transmitter                                | 815DT    |   |                     |  |

**815PT- Z 07 - A - RRINC1** Example Model No.

<sup>1</sup>4-20mA and 1-5V output are software selectable using Modbus or HART as detailed in the general instructions. Units ship with 4-20mA output active unless otherwise requested. Both outputs are not active at the same time.

<sup>2</sup>Only available for Range options 04 thru 08

<sup>3</sup>For pressure Ranges above 0-10,000 psi (Range options 10 and 11)


<sup>4</sup>Dual Seal version is not hermetically sealed. Only available for Range options 00 thru 09 and 21 thru 26.

See page 11 for agency and options.



# 815 Smart Pressure Switch-Transmitters

## Dimensions

Dimensions shown are for reference only. Contact the factory for certified dimension drawings.  
Linear = mm/in.

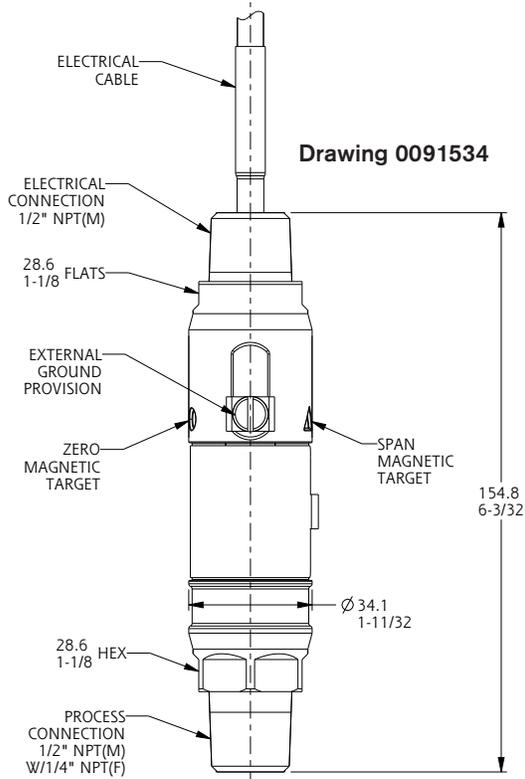

## 815PT Smart Pressure Switch-Transmitter

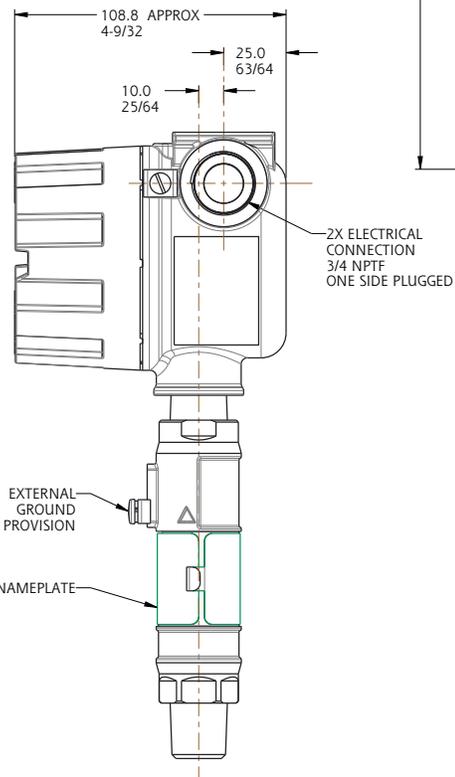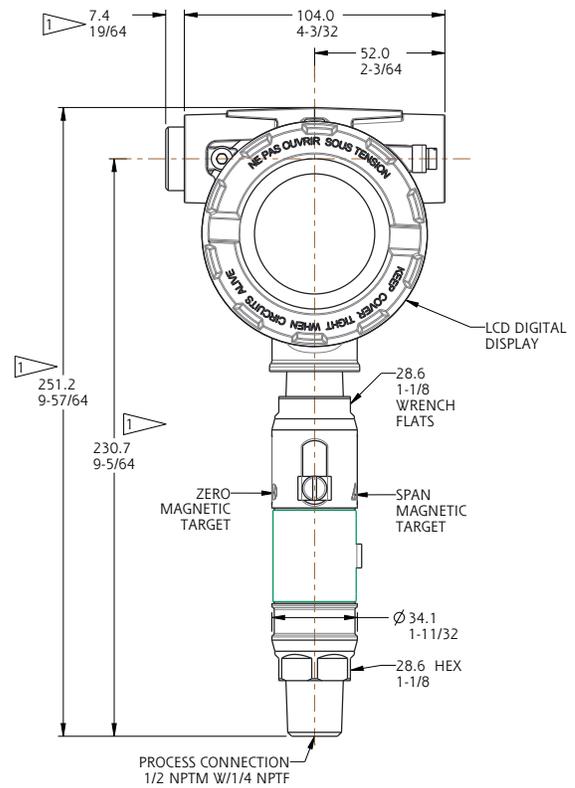

**Drawing 0098750**


1. DIMENSION APPROXIMATE AND BASED ON A FIVE THREAD ENGAGEMENT.
2. TRANSMITTER ORIENTATION MAY VARY IN RELATION TO THE LCD DIGITAL DISPLAY. VARIATION WILL NOT AFFECT FUNCTIONALITY.

*Design and specifications are subject to change without notice. For latest revision, see SORInc.com.*

# 815 Smart Pressure Switch-Transmitters

## Dimensions

Dimensions shown are for reference only. Contact the factory for certified dimension drawings.  
Linear = mm/in.

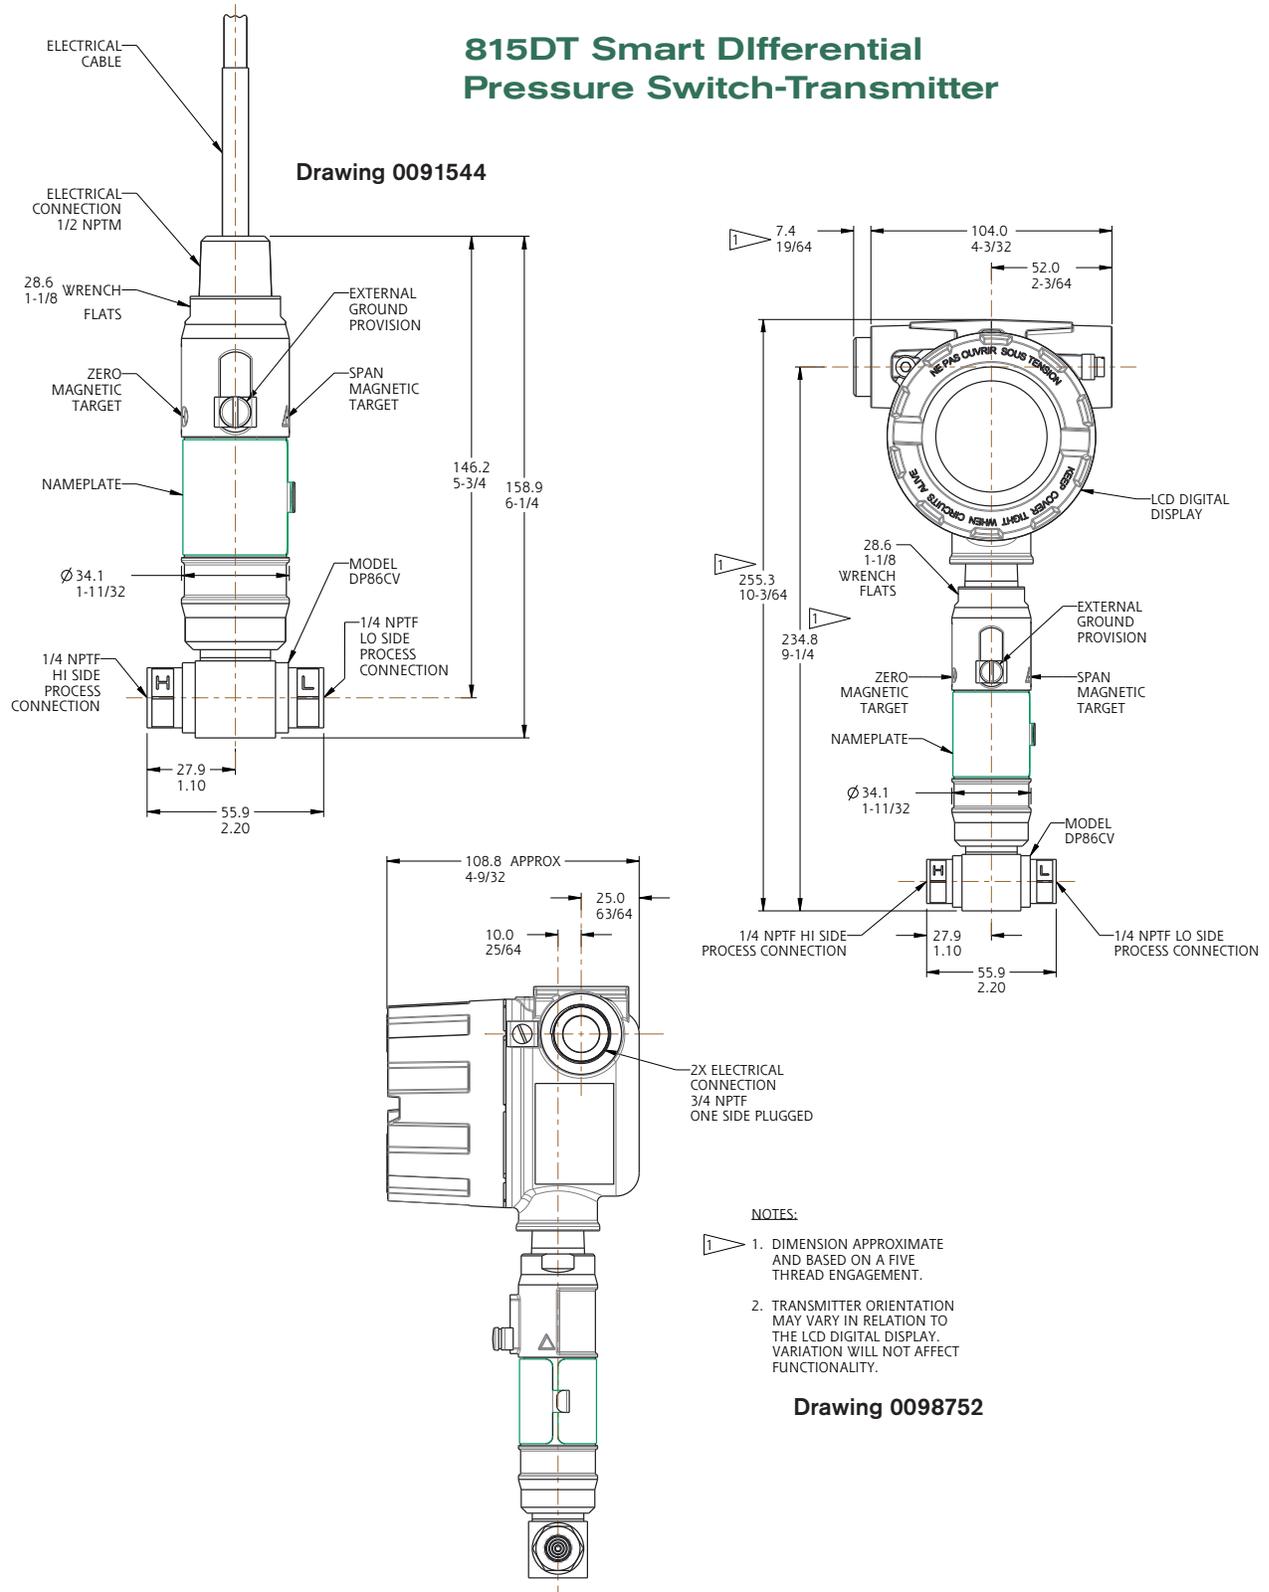

*Design and specifications are subject to change without notice. For latest revision, see [SORInc.com](http://SORInc.com).*

# 800 Series Pressure Transmitters

## Process Connections & Agency

### 805/815 Process Connections

| Designator  | A   | S  | H  | Alternate   |
|-------------|---|--|--|---|
| Description | Stainless Steel, 1/2"NPT(M) with 1/4"NPT(F), (316/316L SS for ranges 0-50 psi and below) (17-4SS for ranges above 0-50 psi) | 316L SS, 1/2" NPT(M) flush-mount, liquid filled, diaphragm seal.                                   | 17-4SS, Autoclave F250C Female (For 1/4" OD Tubing)  | If alternate process connection is required, please consult the factory.  |
| Application | General applications with process materials not containing heavy particulates that could induce clogging of pressure port.  | Use when applications contain dirty, sticky or high particulate process material such as paraffin. | Use for applications where pressures are greater than 10,000 psi, Standard NPT threads are not suitable at these high pressures. | SOR can provide many other process connections including: <ul style="list-style-type: none"> <li>▪ Thread &amp; port size adapters</li> <li>▪ Direct &amp; remote mount diaphragm seals</li> <li>▪ Tri-clamp/sanitary fittings</li> <li>▪ Flanged</li> <li>▪ Other</li> </ul> |
| Photo       |   |                  |   |   |

### Agency Approvals

| Approved*               | Safety Method                          | Approval  |
|-------------------------|--|---|
| FM<br>(U.S. and Canada) | Explosion Proof<br>Hazardous Locations | Class I, II, III; Division 1<br>Groups A-G; T5; Type 4X |
|                         | Non-incendive                          | Class I, II, III; Division 2<br>Groups A-G; T5; Type 4X |
| ATEX/IECEX or INMETRO   | Flameproof                             | Ex db IIC T5 Gb; IP66                                   |

\* Product holds a Canadian Registration Number (CRN) in all provinces, only available for Range options 04 thru 09.